
## nox medical

## Nox Nasal Pressure Cannula with Filter

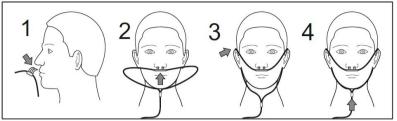

Place the cannula as illustrated in the figures above.

Note: The nasal prongs should point downward inside the nostrils as shown in step 1.

Note: The cannula is validated to give high quality flow signal for use in diagnosis of sleep disordered breathing. Using a cannula that has not been validated for this purpose might compromise the signal quality and the operational reliability of the system.

Warning: The use of the same nasal cannula on more than one patient poses a risk of cross-infection.

- · Adult Size 1 unit
- Nox Pressure Connector
- Total Length: 90cm/35in
- Single Use/Disposable
- Clean, Ready for Use
- Caution: Do Not Sterilize

Material information:

- Nasal Prongs: PVC (plastisol, liquid PVC)

- Tube: FPVC

- Filter tube connector: PTFE, TPU, PP

- Luer-lock: ABS

Disposal: Follow local governing ordinances and recycling instructions regarding disposal or recycling of this device.

For distributor information go to: www.noxmedical.com

Operation: +5°C to +50°C (41°F to +122°F)

Storage: -25°C to +70°C (-13°F to +158°F)

## Assembled in Mexico



(01)15694311110231 (11)170331 (10)042016N56





LOT

042016N56



2017-03-31



Manufactured for: Nox Medical Katrinartuni 2 IS-105 RVK Iceland

